

Remote Switch 4-Output Module

KASTA-4OS2IBH



Smart remote switch output module for the wireless control of KASTA devices from a wall switch with up to four individual mechanisms


FEATURES

- All 4 outputs support 2 modes of operation - toggle output and pulse output- 1, 6, 9 secs
- Toggle output mode - used to toggle load, relay output signal
- Momentary switch output - momentary relay output signal provided to control another source
- Reliable Bluetooth® mesh network connectivity to all KASTA devices
- 8-way multiway control
- Built-in over-voltage protection
- Supports core KASTA functionality - control devices, groups, scenes
- iOS and Android app setup and control
- 3 year warranty

SPECIFICATIONS

Power Supply	220-240V a.c. 50Hz / 24V d.c.
Operating Ambient Temperature	-20 to 50°C
IP Rating	IP20
Physical Connection Type	Terminals
Wiring Connections	Power - Line, Neutral/Negative Switching - Line, Load
Input Voltage (C1-C2)	12V d.c., 24V d.c., 240V a.c.
Housing Material	Polycarbonate (PC)
Standards Complied	AS/NZS 60950.1, AS/NZS CISPR 15, AS/NZS 4268

DIMENSIONS

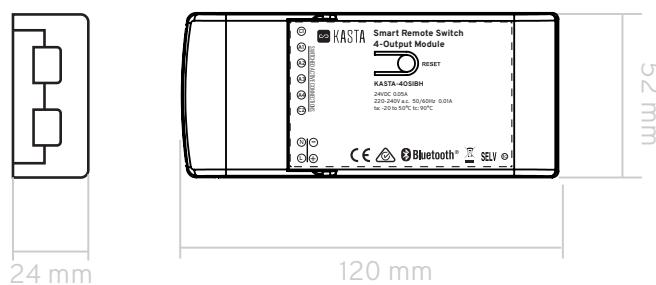

CONNECTION

