


Installation Instructions



Smart AC Ceiling Fan Controller

Product Code: KASTA-FC150A

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app. iOS: requires iOS 9.0 or later. Android: requires Android 4.4 or later. Devices must support Bluetooth 4.0





Important Safety Informatioin

- •This product must be installed by a licensed electrician in accordance with all the require ments of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- •Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- •Indoor use only. Not suitable for damp or explosive environments.
- •Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- •No user serviceable parts inside.

FEATURES

- Control of AC ceiling fan motors (max. 150W load).
- Provides capacitor switching for 3-speed control of fan speed.
- Contains relay for ON/OFF control of fan light (max. 300W load).
- 7 wire connection for power, fan, light and switch mechanisms (momentary push button).
- · Wireless Bluetooth Mesh communication.
- Can be paired with KASTA remote switches for 1 or 2 button operation of fan speed and control of fan light (8x maximum per fan controller).
- Configured and controlled using the KASTA app (iOS and Android).
- Supports Group, Scene, Timer and Scheduling automation functions.
- Built in overvoltage and overcurrent protection.
- Easily installed under the fan canopy.
- 3 year warranty.

FUNCTION SETUP

REMOTE SWITCH CONNECTION

ON/OFF (FAN/LIGHT)	1 CLICK
Turns light or fan on or off.	
FAN SPEED UP/DOWN (FAN)	1 LONG PRESS
Cycles through fan speeds.	
MAXIMUM SPEED (FAN)	2 CLICKS
Sets fan speed to maximum.	
DELAY TO OFF (FAN/LIGHT)	3 CLICKS
Turns light and/or fan off automatically after set time configured in app. 1 click to cancel.	
MINIMUM SPEED (FAN)	4 CLICKS
Set fan speed to minimum.	
LIGHT (S1 CONNECTION)	
ON/OFF LIGHT	1 CLICK
Turns light on or off.	
DELAY TO OFF	3 CLICKS*
Turns light off automatically after set time configured in app. 1 click to can cel.	
PAIRING MODE	6 CLICKS
Enter pairing mode for multi-way function.	
FACTORY RESET	9 CLICKS

Restores all settings back to factory.

*If successful, light will pulse the number of times that the switch was clicked, indicating function.

FAN (S2 CONNECTION)


FAN (SZ CONNECTION)	
ON/OFF FAN	1 CLICK
Turns fan on or off. Fan adjusts to previous set speed	
DELAY TO OFF	3 CLICKS*
Turns light off automatically after set time configured in app. 1 click to can cel.	
FAN SPEED UP/DOWN	1 LONG PRESS
Cycles through fan speeds.	
MAXIMUM SPEED	2 CLICKS
Sets fan speed to maximum.	
DELAY TO OFF	3 CLICKS
Turns fan off automatically after set time configured in app. 1 click to cancel.	
MINIMUM SPEED	3 CLICKS
Turns fan off automatically after set time configured in app. 1 click to cancel.	
DELAY TO OFF	3 CLICKS
Turns fan off automatically after set time configured in app. 1 click to cancel.	
MINIMUM SPEED	4 CLICKS

ver 1.4 kasta.com.au | (02) 9168 5900

Sets fan speed to minimum.



Installation Instructions



Smart AC Ceiling Fan Controller

Product Code: KASTA-FC150A

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app. iOS: requires iOS 9.0 or later. Android: requires Android 4.4 or later. Devices must support Bluetooth 4.0





Important Safety Informatioin

- •This product must be installed by a licensed electrician in accordance with all the require ments of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- •Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- •Indoor use only. Not suitable for damp or explosive environments.
- •Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- •No user serviceable parts inside.

PAIRING MODE 6 CLICKS

Enter pairing mode for multi-way dimming. Remote switch backlight will pulse.

FACTORY RESET 9 CLICKS

Restores all settings back to factory.

TECHNICAL SPECIFICATIONS


Operating Temp: -20°c to 40°c

Supply: 220-240V AC 50/60Hz

Range: Up to 30m open air

Max. Rated Load: 150W (fan), 300W (light)

CONNECTION DIAGRAM

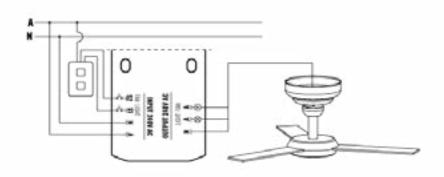



ver 1.4 kasta.com.au | (02) 9168 5900