


# XRS10 SPECIFICATIONS


XRS10 two way 1" compression driver and 10" woofer 250 watt speaker system supplied with foldback kit.

## POLAR PLOTS – Vertical directivity




CURVE	FREQ	0dB	-6dB angle	Q	DI
—	250Hz	-4.8	168.2	2.5	3.9
—	500Hz	-5.5	163.3	2.7	4.4
—	1000Hz	-5.4	110.6	4.1	6.1
—	2000Hz	-6.2	105.3	4.2	6.3
—	4000Hz	-4.5	77.5	5.1	7.0
—	8000Hz	-5.1	64.0	7.5	8.8

## POLAR PLOTS – Horizontal directivity



CURVE	FREQ	0dB	-6dB angle	Q	DI
—	250Hz	-5.4	147.8	2.6	4.2
—	500Hz	-5.4	116.2	3.7	5.7
—	1000Hz	-4.4	103.5	4.2	6.3
—	2000Hz	-6.2	26.5	5.9	7.7
—	4000Hz	-5.2	79.8	5.7	7.6
—	8000Hz	-6.1	64.2	7.0	8.5


## FREQUENCY RESPONSE CURVE

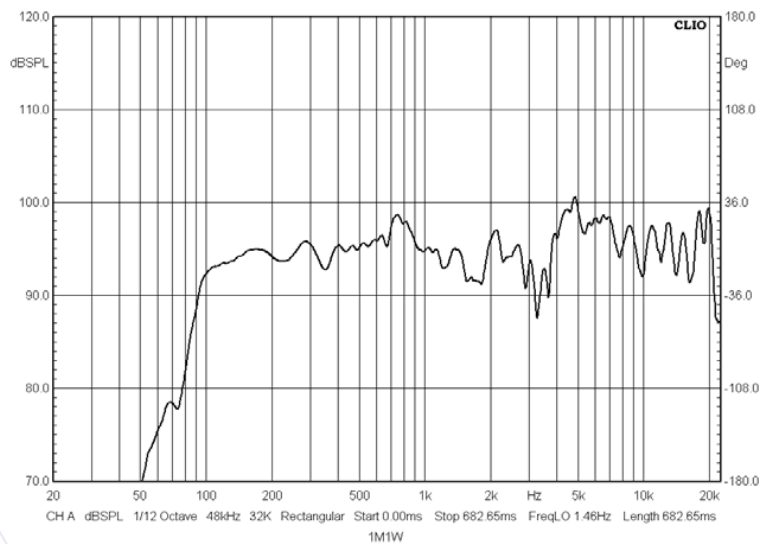



# XRS10 SPECIFICATIONS

## DIMENSIONS (mm)

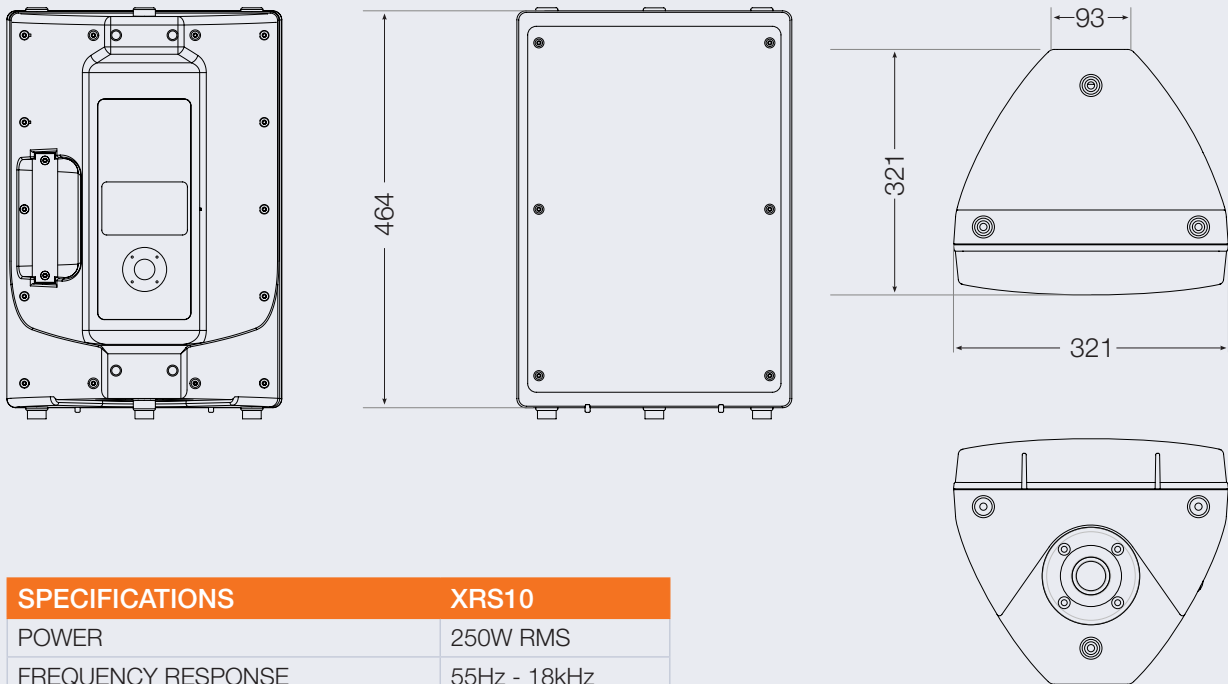

SPECIFICATIONS	XRS10
POWER	250W RMS
FREQUENCY RESPONSE	55Hz - 18kHz
SENSITIVITY	95dB (1W / 1Metre)
COMPRESSION DRIVER DISPERSION	90 x 90
WEIGHT	10kg